

FYRE DECK[®]


VERSATILE

Patent application number 190092GB

FYRE DECK[®] VERSATILE is our patent pending 2 part non-combustible aluminium flooring system. Versatile is perfect for when fire or acoustics are important as it allows for sound proofing and fire barrier interlayers.

Slip resistant, slim, sustainable and safe.

- Patent pending acoustic and fire technology
- Non-combustible
- Engineered profiles for maximum strength and style
- Recycled aluminium
- Ideal for balconies

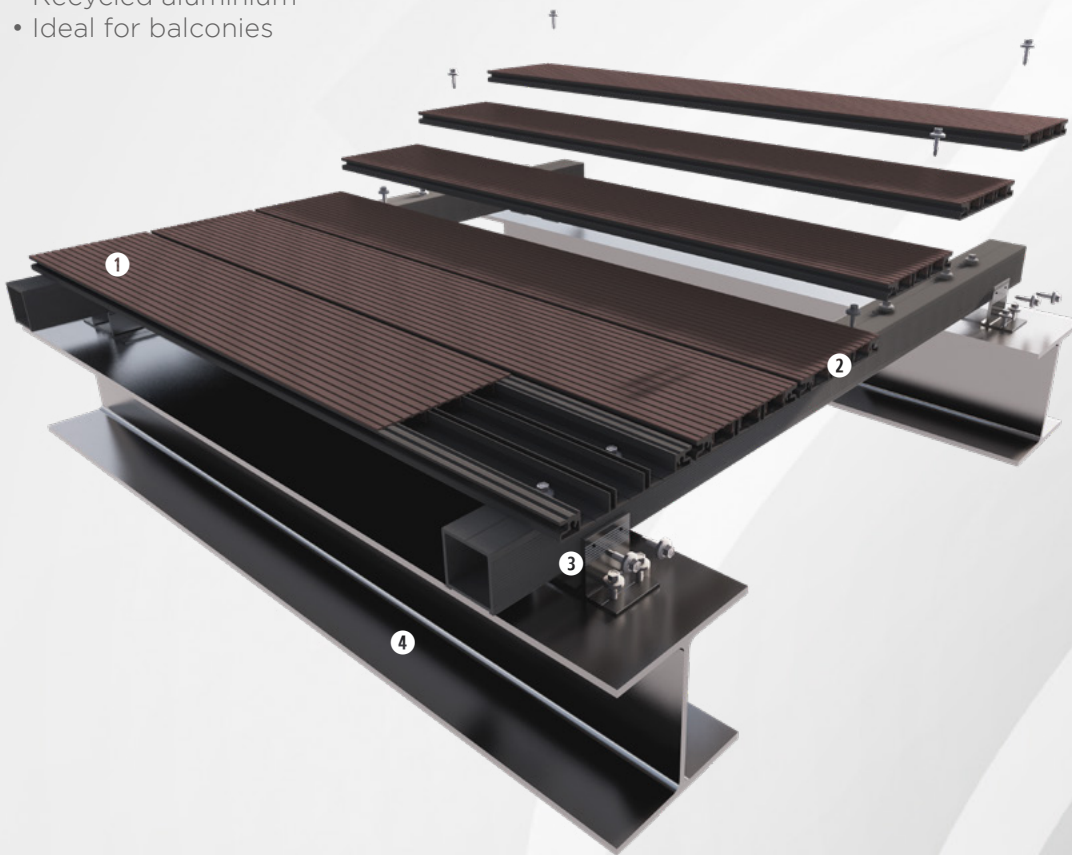

1 Decking Boards

- Patent pending CDM compliant 2 part system
- Precision manufactured
- Maintenance free
- Wide range of finishes

2 Attention to Detail

- Acoustic fire barrier interlayer
- Engineered infill board to meet any shape
- End plates


3 Smart Fixing

- Perfect fit alignment clips
- Quick and simple

4 Sub-Floor

- High strength support bearer
- Accurate and simple height adjustment

System Height Overview

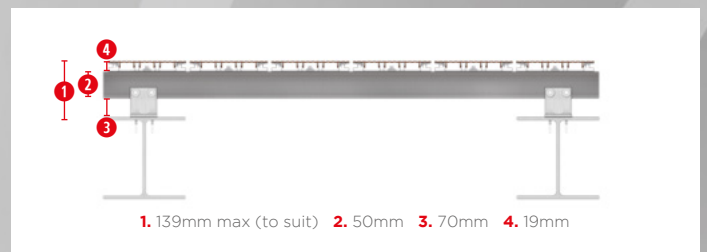

GROUPY[®] FYRE DECK[®]

FYRE DECK VERSATILE 01/19 ©FYRE DECK LIMITED

Registered in England No. 11842337 Registered address: Fyre Deck Limited - Part of the Group Y, The Oast, Stone Green Farm, Mersham, Kent TN25 7HE

For our complete range of non-combustible flooring systems visit www.fyredeck.co.uk

T: +44 (0) 1233 721 190 E: sales@fyredeck.co.uk

Technical Specification

FYRE DECK[®] VERSATILE ORDER CODES:

Order Code	Surface
FDV-G	Grooved
FDV-R	Recessed
FDV-SL	Sloped
FDV-SE	Serrated

PRODUCT FEATURES:

	Aluminium Decking Boards	Joist	Pedestal
Fire rating	A2 -s1,d0	A1	A1
Acoustic value	Low		
Slip resistance	R12		
Load	Greater than 4.0/kN/m ²	Greater than 4.0/kN/m ²	Greater than 4.0/kN/m ²
Dimensions	145mm X 19mm	50mm X 50mm	Adjustable to 110mm
Profile thickness	2mm or above		
Span between supports	600mm	600mm	600mm
Colour options	Textured, Anodised, PPC, Mill Finish		
Profiles surface	Grooved, Recessed, Sloped, Serrated		
Durability	Corrosion free	Corrosion free	Corrosion free
Warranty	50 years	50 years	50 years

